


Lito40
Linear

litofis

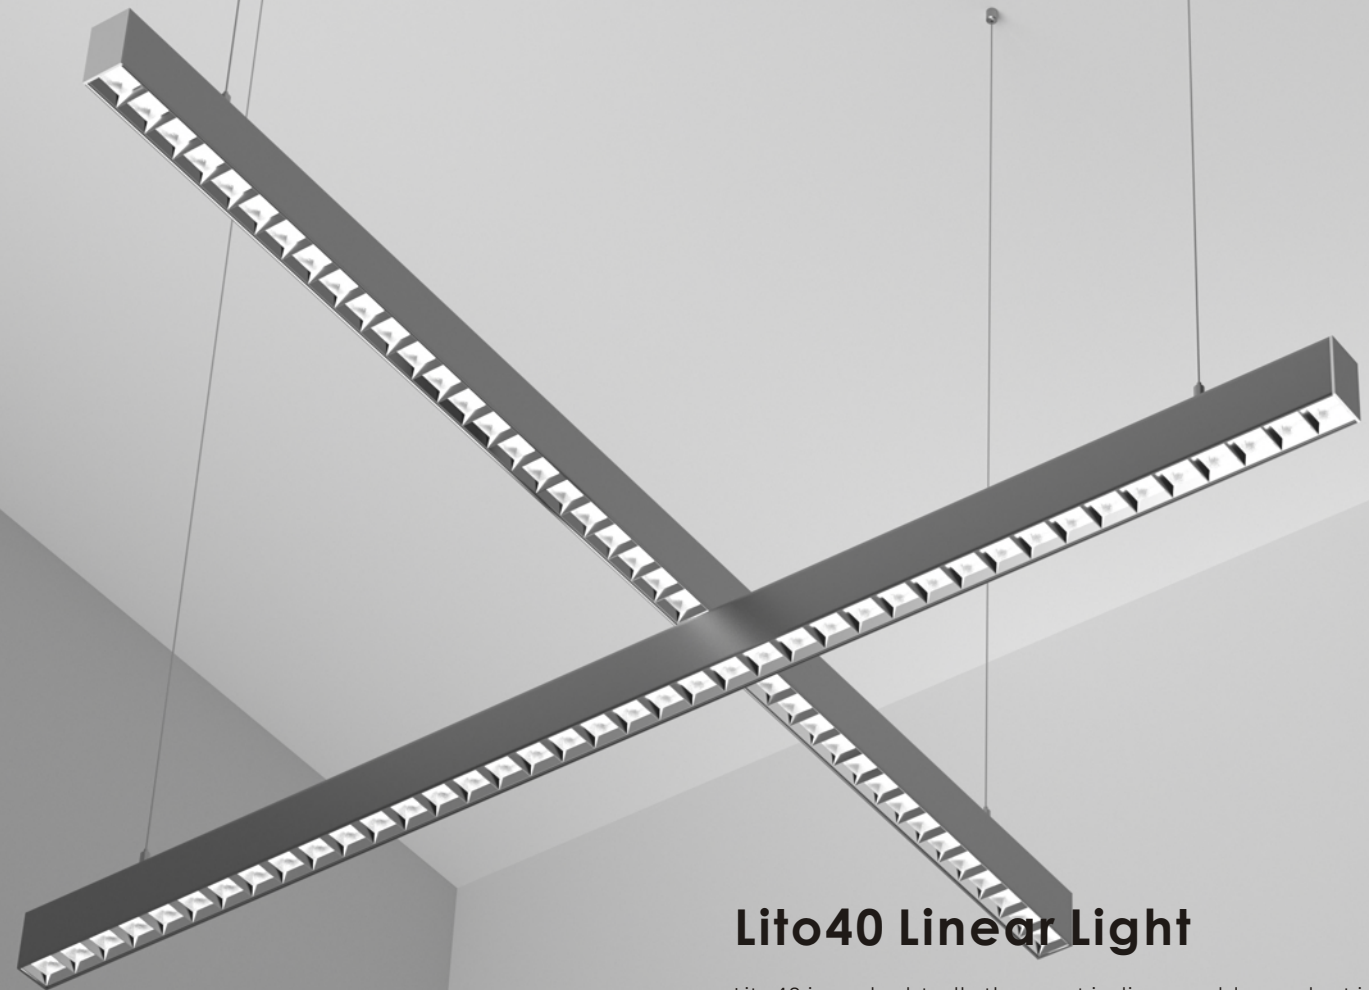

Lito40 Linear Light

Lito40 is undoubtedly the most indispensable product in accent lighting scenes. This lighting system uses accent lighting technology, making your living space richer and more colorful. It not only enhances the hierarchy and quality of the space but also brings you a smarter and more comfortable lighting experience.

It can increase the lighting intensity of a specific area, making it more prominent and eye-catching. It can make the details of a specific object clearer, thereby improving its viewing and aesthetic appeal. It can improve the lighting effect, making the place brighter and more comfortable. It can also highlight the characteristics and decorative effects of the building, enhancing the beauty and viewing pleasure of the architecture.


Whether it is a store, museum, office, or hotel lobby, Lito40 Linear Light System can meet the customer's demand for specific area lighting.

Lito40
Linear


litofis



**MAGNETIC
TOP COVER**

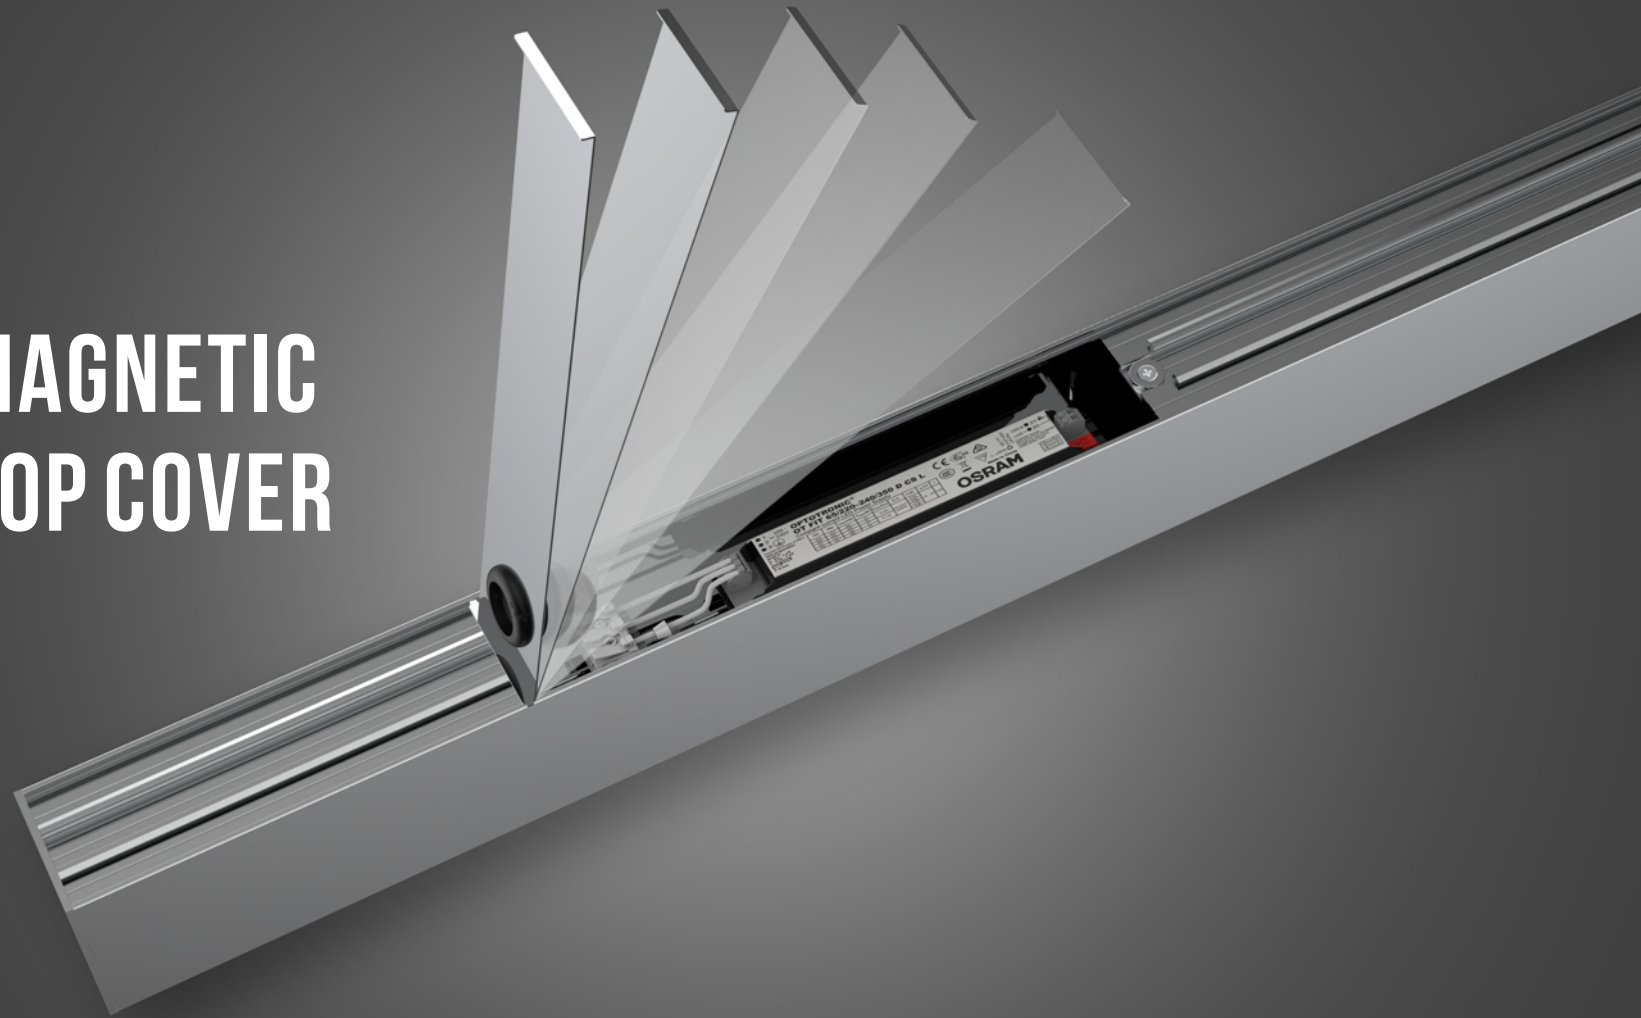


EASY TO INSTALL AND MAINTAIN

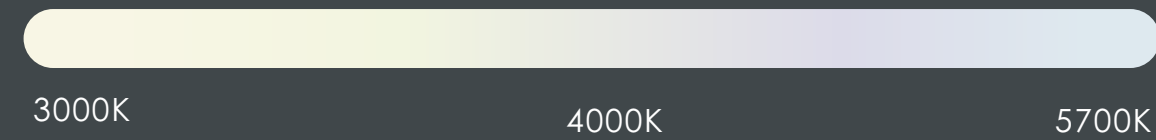


UNLIMITED CONTROL

DIE-CASTING ALUMINUM END CAP

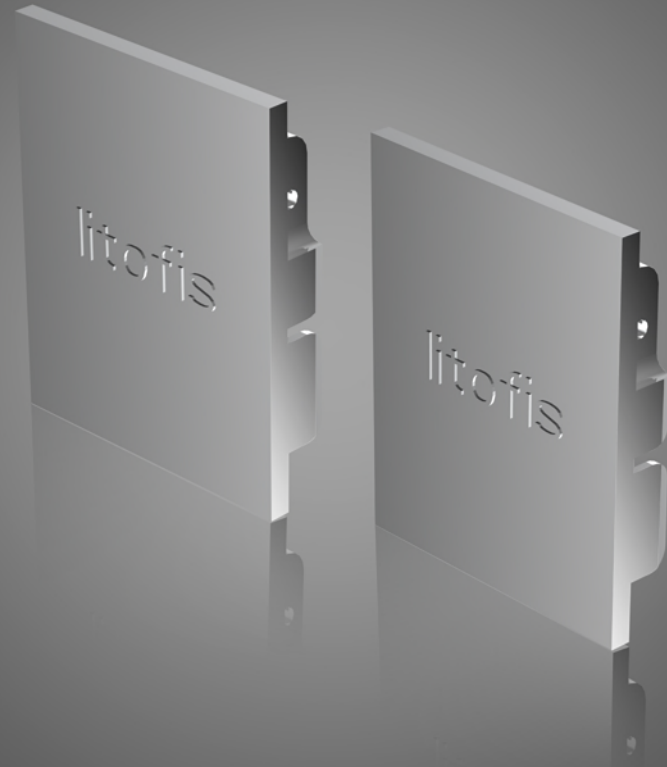

CUSTOMIZE YOUR LOGO ON IT!

Full range installation ways

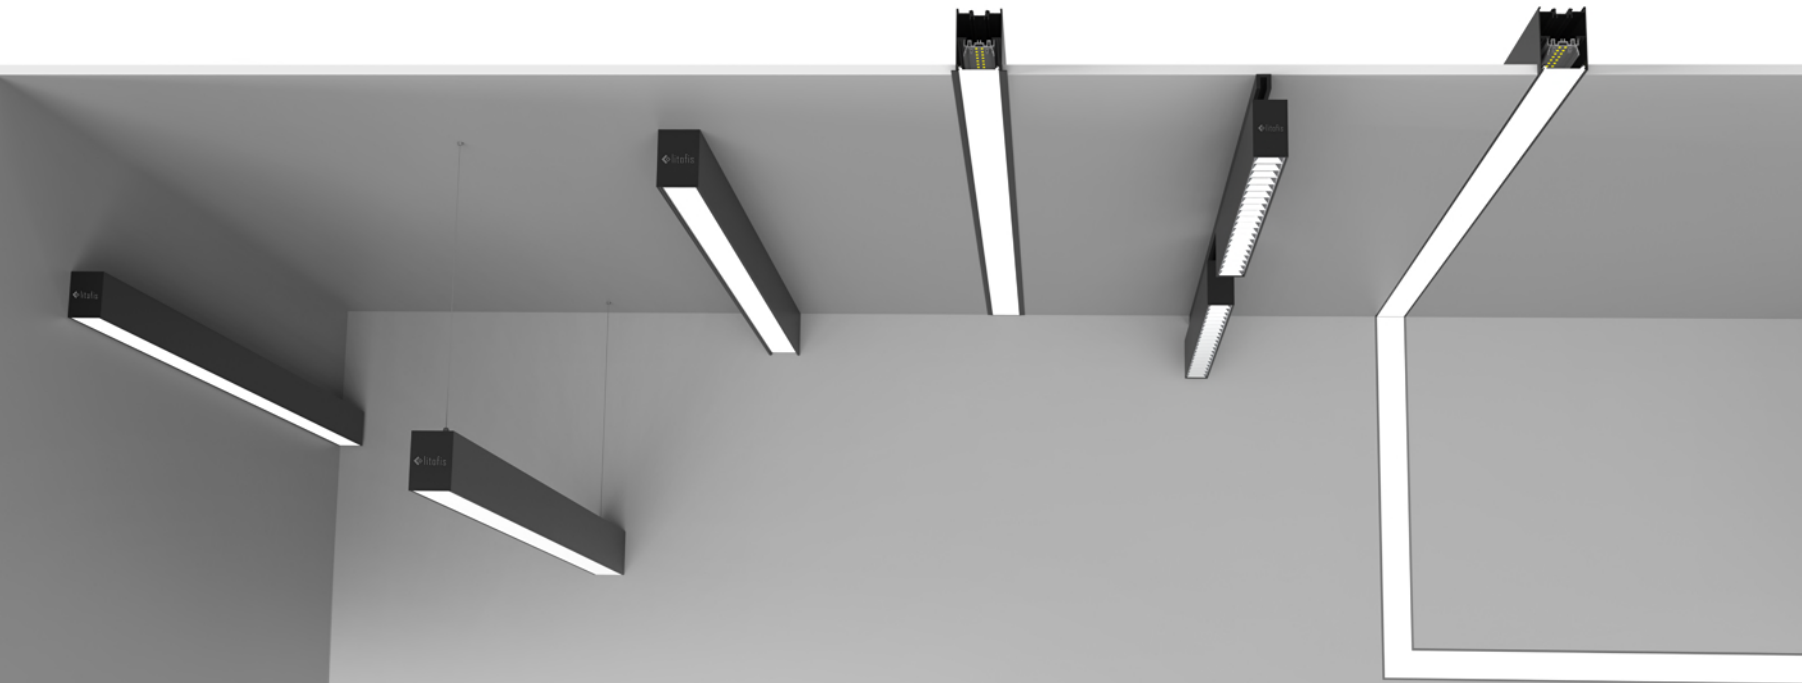

Wall mounted



Suspended



Surface mounted




Track mounted




Eye Glare Protection

To meet the demands of different usage scenarios, the Lito40 offers a variety of optical lenses to choose from. The UGR<16 reflection cup design allows for more focused and brighter lighting, highlighting the key areas of a space and creating a more comfortable and focused atmosphere. The UGR<19 MPR Diffuser combines aesthetics with the comfort of lighting, while the OPAL Diffuser offers a unique lighting experience.

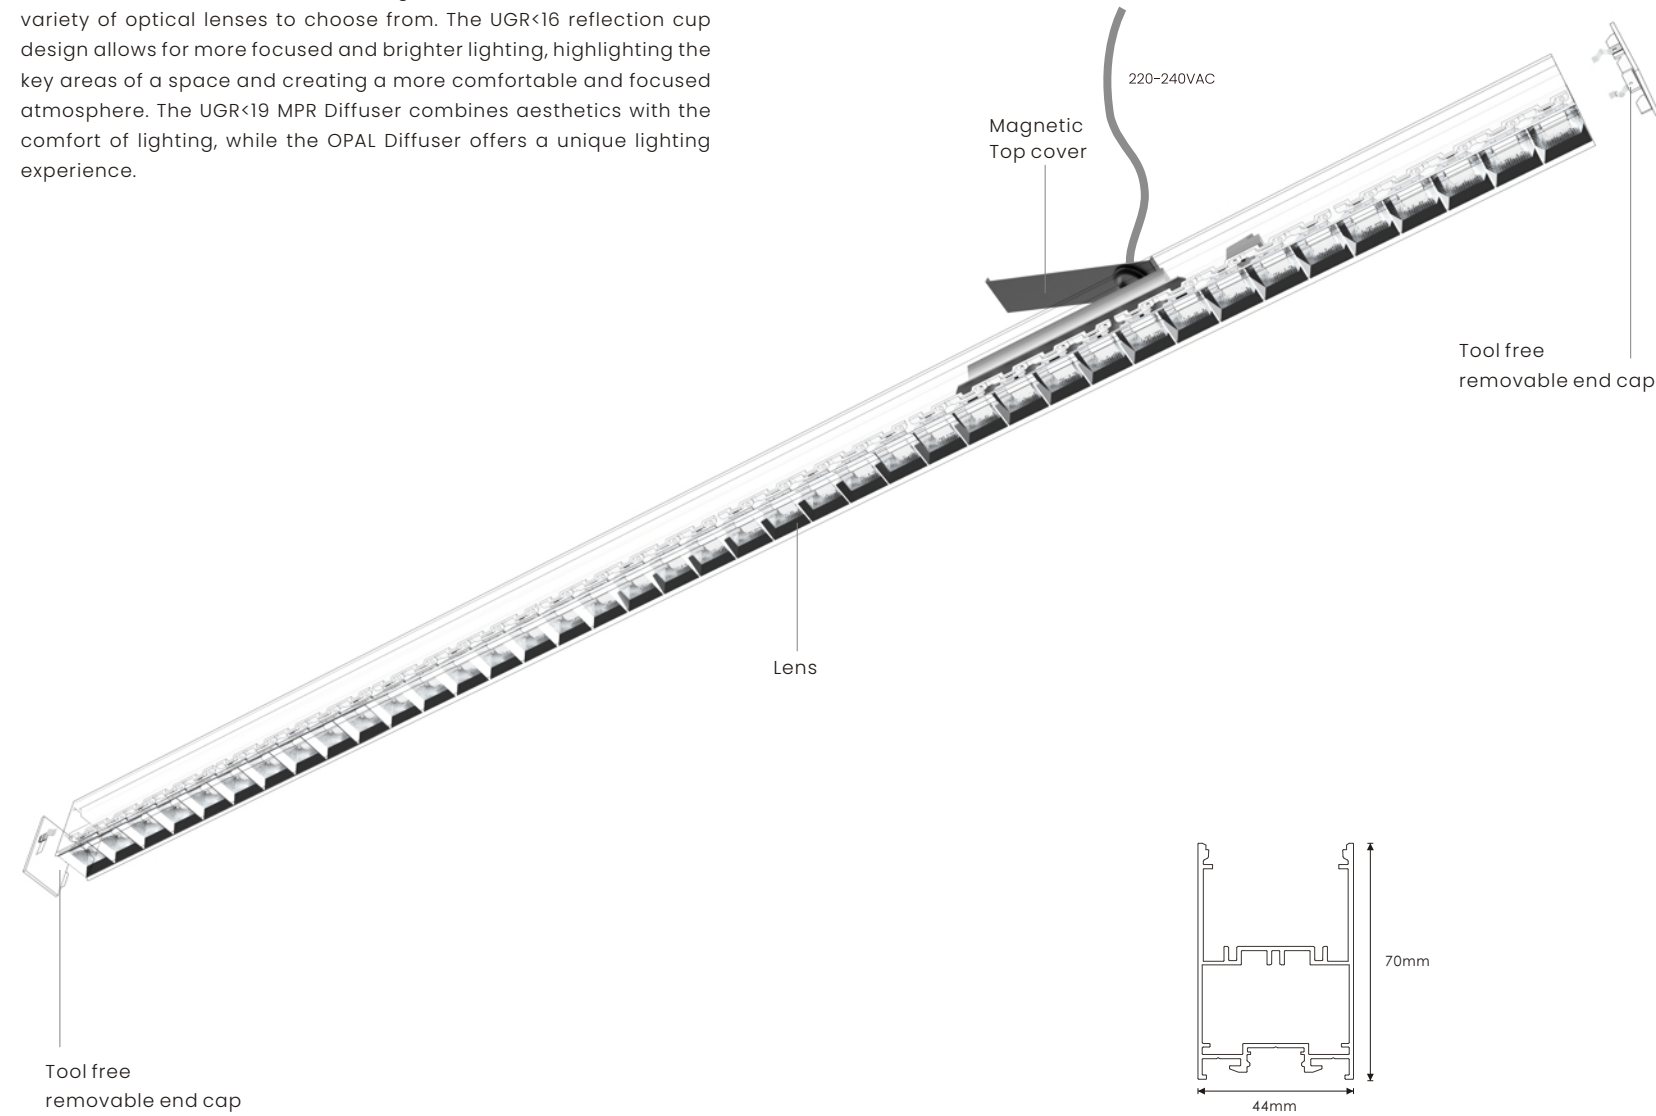

Explosion diagram and optional accessories

Under a slim appearance lies powerful functionality. The Lito40 is ingeniously designed, with a rear cover that uses magnetic suction technology to make the disassembly, installation, and maintenance of the product more convenient. This feature also ensures a more secure connection, reducing the risk of detachment and providing a safer and more stable experience for customers.

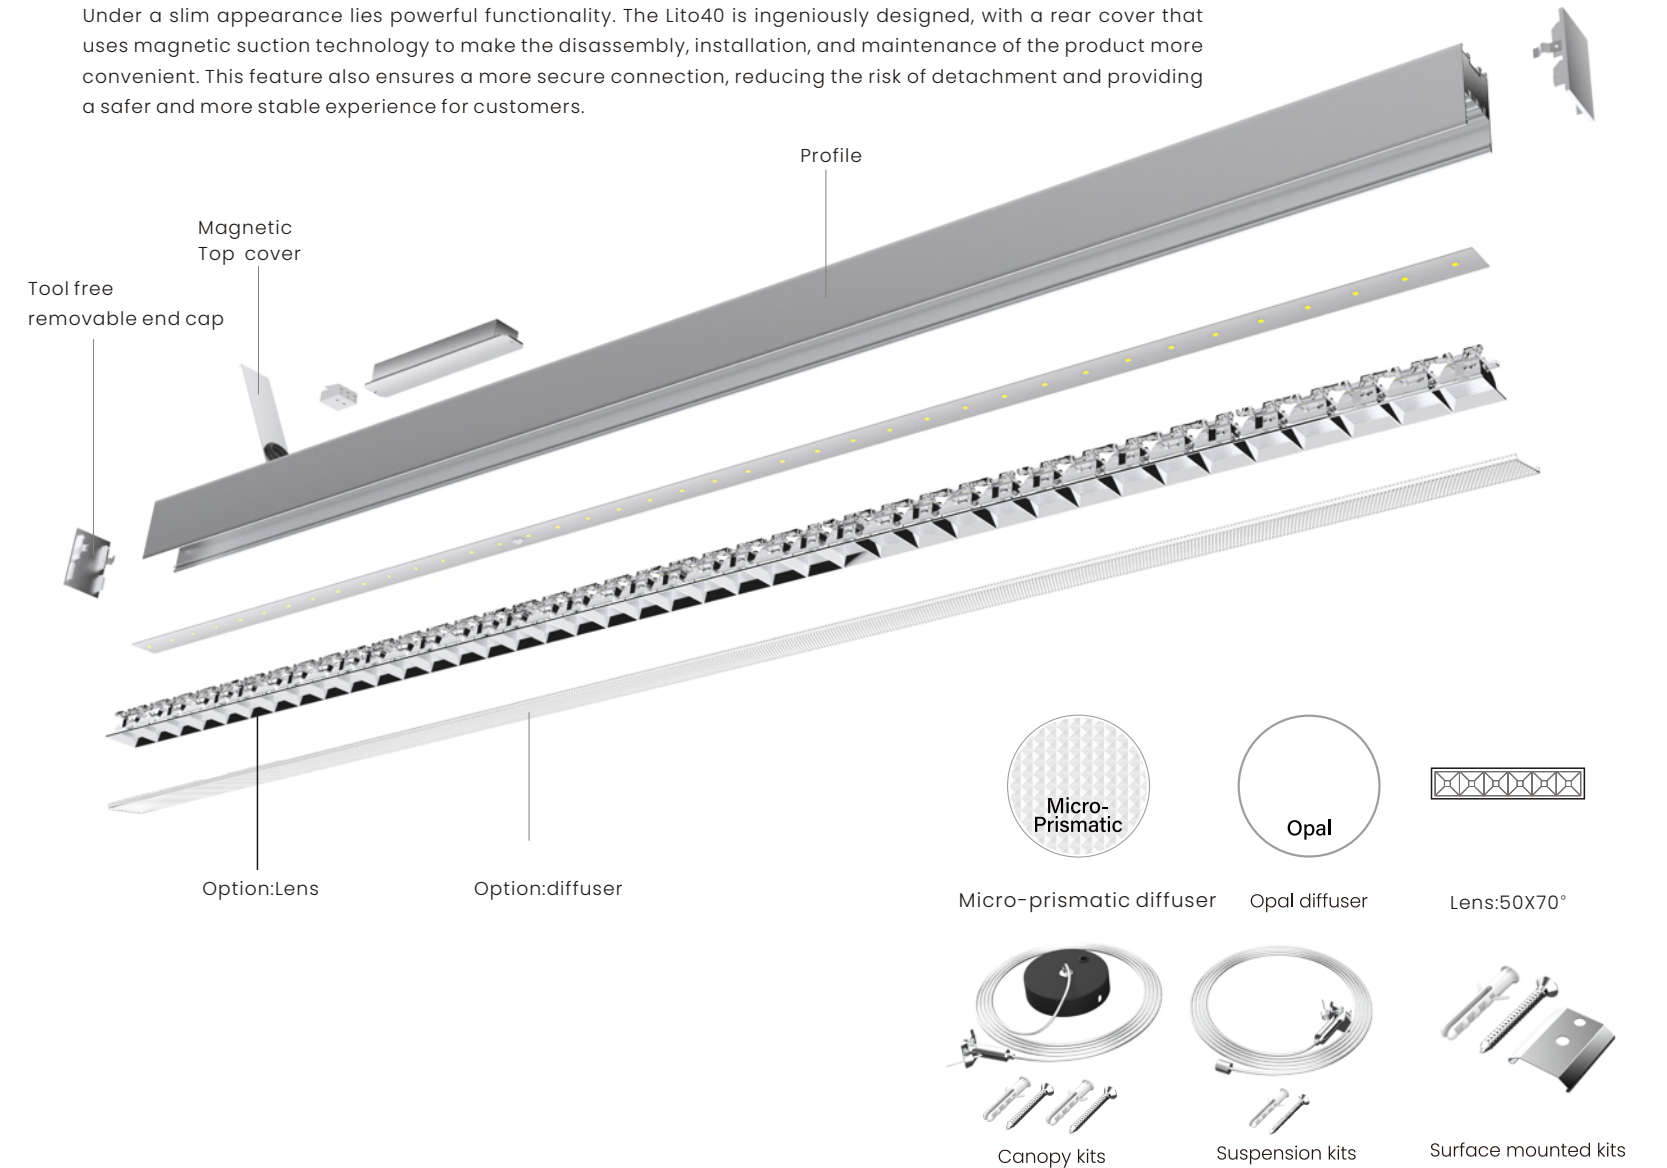

Wide Rang Options

Lito40 provides various ways to install, choose from surface-mounted, wall-mounted, track mounted, suspended options.

Mounting



Color




Optics



Approval




Length



Control




Light Distribution

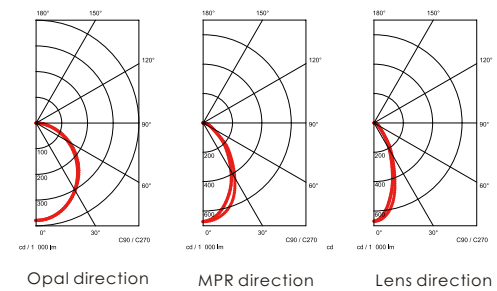

Order code

Lito40X-XXXX-RXXX-XXX-XXX-XX-X-XXXXW

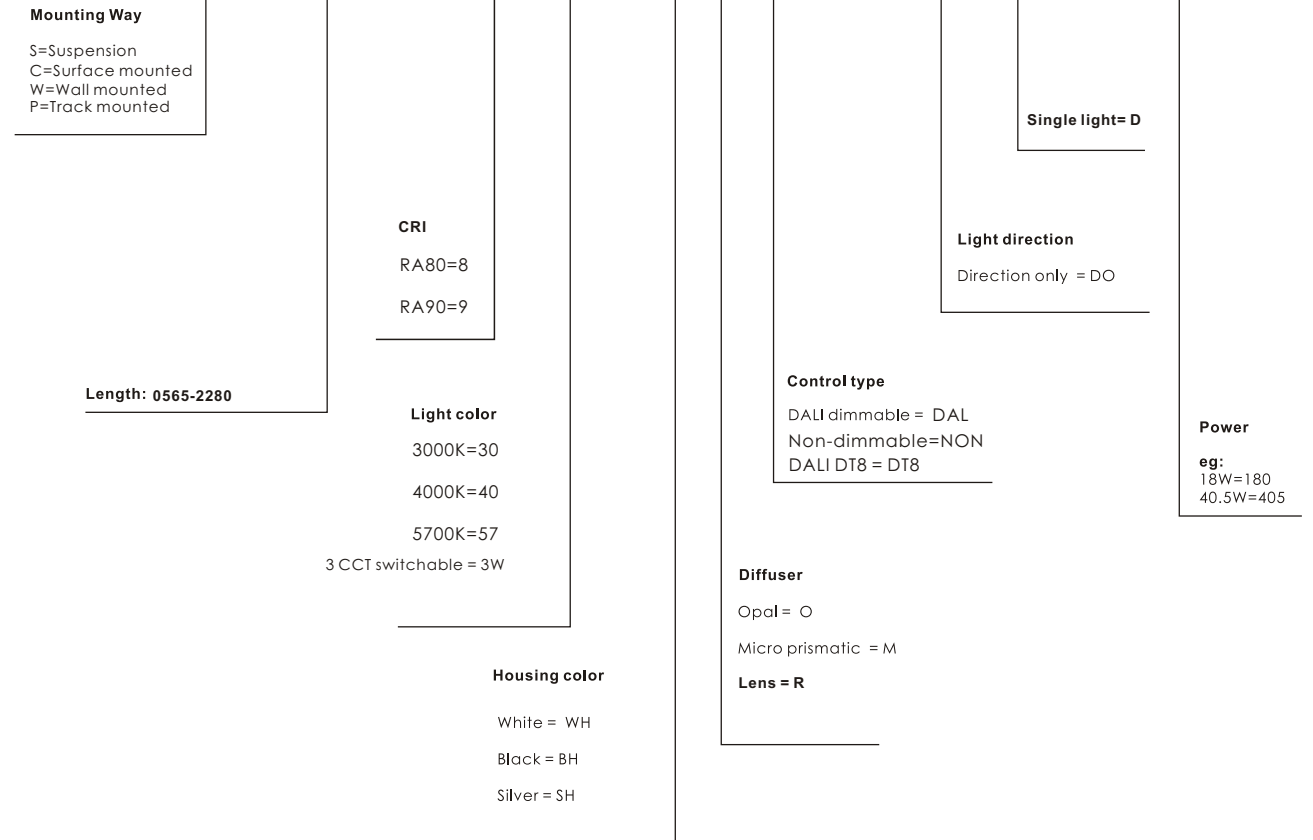


Eg.

Lito40S-2245R840-BHO-NON-DO-D-720W

means :

Lito40 SUSPENDED, 2245MM LONG, RA80, 4000K, BLACK HOUSING, OPAL DIFFUSER, NON DIMMABLE, DIRECTION, SINGLE LIGHT, 72W

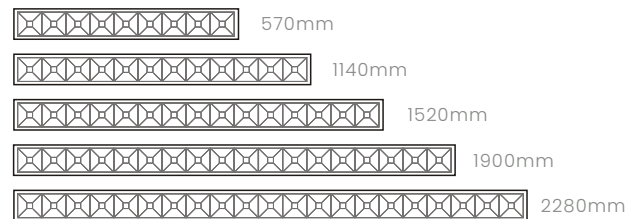

Item	Length	Section size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Driver	Control
LITO40-565	565mm	W44XH70mm	single light	220-240VAC	10-18W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-845	845mm	W44XH70mm	single light	220-240VAC	15.5-29W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1125	1125mm	W44XH70mm	single light	220-240VAC	20.5-36W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1405	1405mm	W44XH70mm	single light	220-240VAC	26-45W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1685	1685mm	W44XH70mm	single light	220-240VAC	31-54W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1965	1965mm	W44XH70mm	single light	220-240VAC	36-63W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-2245	2245mm	W44XH70mm	single light	220-240VAC	41-72W	115lm/w	White/Black/Silver grey	Opal/Micro-prismatic	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<22/UGR<19	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)

Item	Length	Section size	Link	Voltage	Power	System Efficacy	Color	Optics	LEDs	CCT	CRI	Color consistency	UGR	Driver	Control
LITO40-570	570mm	W44XH70mm	single light	220-240VAC	10-18W	115lm/w	White/Black/Silver grey	Lens	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<16	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1140	1140mm	W44XH70mm	single light	220-240VAC	20.5-36W	115lm/w	White/Black/Silver grey	Lens	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<16	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1520	1520mm	W44XH70mm	single light	220-240VAC	27-48W	115lm/w	White/Black/Silver grey	Lens	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<16	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-1900	1900mm	W44XH70mm	single light	220-240VAC	33-58W	115lm/w	White/Black/Silver grey	Lens	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<16	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)
LITO40-2280	2280mm	W44XH70mm	single light	220-240VAC	40-70W	115lm/w	White/Black/Silver grey	Lens	Osram	3000K/4000K/5700K or TW 3000K-5700K	CRI>80 / CRI>90	MacAdam step 3	UGR<16	Osram	ON-OFF/DALI 2 /DALI DT8(tunable white)

Specification of different length and current

length (mm)	@350mA		@300mA		@250mA		@200mA	
	Power(W)	lumen	Power(W)	lumen	Power(W)	lumen	Power(W)	lumen
565	18.0	2070	15.4	1821	12.9	1543	10.3	1255
845	27.0	3105	23.1	2731	19.3	2314	15.4	1882
1125	36.0	4140	30.9	3641	25.7	3086	20.6	2510
1405	45.0	5175	38.6	4551	32.1	3857	25.7	3137
1475	47.3	5434	40.5	4779	33.8	4050	27.0	3294
1545	49.5	5693	42.4	5007	35.4	4243	28.3	3451
1615	51.8	5951	44.4	5234	37.0	4436	29.6	3608
1685	54.0	6210	46.3	5462	38.6	4629	30.9	3765
1965	63.0	7245	54.0	6372	45.0	5400	36.0	4392
2245	72.0	8280	61.7	7282	51.4	6171	41.1	5019

*Options:
-Presence and light sensors
-Emergency: 1h or 3h
-2700k or other CCT
-100-277VAC

*The length mentioned above means the profile length without the end cap for general version, each end cap is 3mm long;

*Lumen is based on completed linear light. (modules are in the profile, and covered by diffuser)

*There might be 5% tolerance of Power, due to the Vf value of Osram LEDs changing while the current changing.

Specification of different length and current

length (mm)	@350mA		@300mA		@250mA		@200mA	
	Power(W)	lumen	Power(W)	lumen	Power(W)	lumen	Power(W)	lumen
570	18.0	2070	15.4	1821	12.9	1543	10.3	1255
1140	36.0	4140	30.9	3641	25.7	3086	20.6	2510
1520	48.0	5520	41.1	4855	34.3	4114	27.4	3346
1900	60.0	6900	51.4	6069	42.9	5143	34.3	4183
2280	72.0	8280	61.7	7282	51.4	6171	41.1	5019

*Options:
-Presence and light sensors
-Emergency: 1h or 3h
-2700k or other CCT
-100-277VAC

*The length mentioned above means the profile length without the end cap, each end cap is 3mm long.

*Lumen is based on completed linear light. (modules are in the profile, and covered by diffuser)

*There might be 5% tolerance of Power, due to the Vf value of Osram LEDs changing while the current changing.

Lito40

Linear

litofis

Lito40

Linear

litofis

Lito40

Lito40

